

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 038 919 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
27.09.2000 Bulletin 2000/39

(51) Int. Cl.⁷: **C08L 33/16**, **C08L 75/04**,
D06M 15/277, **D06M 15/576**

(21) Application number: **00105518.5**

(22) Date of filing: **15.03.2000**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **25.03.1999 IT MI990608**

(71) Applicant: **Ausimont S.p.A.**
20121 Milano (IT)

(72) Inventors:
• **Lenti, Darla**
15048 Valenza Po, Alessandria (IT)
• **Trombetta, Tania**
Sovico, Milano (IT)
• **Carignano, Gabriella**
20020 Arese, Milano (IT)

(74) Representative:
Sama, Daniele, Dr. et al
Sama Patents,
Via G.B. Morgagni, 2
20129 Milano (IT)

(54) **Hydro- oil-repellent compositions**

(57) Compositions formed of aqueous dispersions comprising a mixture of the following fluorinated polymers:

A) (meth)acrylic (co)polymers containing fluorine, and

B) cationic ionomers of fluorinated polyurethanes based on (per)fluoropolyethers, the weight ratio A):B), calculated on the dry product, being in the range 70:30 and 30:70.

EP 1 038 919 A1

Description

[0001] The present invention relates to compositions to be applied on textiles to make them hydro- and oil-repellent in combination with a very good softness and with the maintenance of the textile appearance.

[0002] In order to make hydro- and oil-repellent the surfaces of various materials, the use of various types of polymers, also fluorinated, is known in the prior art. For example fluorinated polymers with various kinds of functionality can be mentioned. Specifically for textiles, fluorinated polymers having an acrylic base wherein the fluorinated part is formed of fluorocarbon chains, can be mentioned. Other fluorinated polymers used to give hydro- and oil-repellence are those having a (per)fluoropolyether structure, in particular polyurethanes. These polymers are used in the form of their aqueous dispersions to treat textiles. Hydro- and oil-repellence depend on the kind of polymer and the functionality.

[0003] In all the patents of the prior art no reference is made to the softness of the treated textiles. This is an essential feature since the treated textiles in addition to very good hydro- and oil-repellence values must show a softness which is substantially similar to that of the untreated textiles. By textile appearance it is meant that the treatment does not substantially change the colour and the gloss with respect to the textiles as such.

[0004] USP 2,995,542, USP 3,356,628 and USP 4,529,658 relate to the synthesis of fluoroacrylic polymers and their use for the fiber and textile treatment. After treatment with these polymers, very good hydro- and oil-repellence values, higher than those obtainable with other fluorinated polymers which have other kinds of functionality and structure, are obtained. However, the fluoroacryl polymers show the following drawbacks: the fiber or textile surface appearance is modified, perspirability is reduced and textiles become stiffer. This last aspect of the treated textiles is determined by the softness examination, as called in the technical language. In case of the application of said films, the textile softness becomes worse.

[0005] The need was therefore felt to have available compositions for the surface textile treatment combining the very good hydro- and oil-repellence characteristics with the appearance and softness of the untreated textiles. In other words there was the need to find compositions which, besides conferring very good hydro- oil-repellence, did not worsen the textile softness and appearance.

[0006] It has now been surprisingly and unexpectedly found that it is possible to solve said technical problem by treating textiles with compositions in the form of aqueous dispersions as hereinunder defined.

[0007] It is an object of the present invention compositions formed of aqueous dispersions comprising a mixture of the following fluorinated polymers:

- A) (meth)acrylic (co)polymers containing fluorine, and
- B) cationic ionomers of fluorinated polyurethanes based on (per)fluoropolyethers,

the weight ratio A):B), on the dry product, being in the range 70:30 and 30:70, preferably 60:40 and 40:60, with the proviso that component A) must not be lower than about 0.5% by weight as dry product in the dispersion.

[0008] Preferably component B) is present in the dispersion at a concentration of about 0.4% by weight, more preferably 0.5%.

[0009] The invention compositions are used in aqueous dispersions at a concentration in the range 0.7-3% w/w, preferably 0.8-1.5% w/w, still more preferably 0.9-1.3% w/w, determined as dry residue.

[0010] Component B), cationic ionomer fluorinated polyurethanes, usable in the present invention, are based on (per)fluoropolyethers and are obtainable with known methods of the prior art. See for example EP 273,449, EP 337,312, EP 533,159, EP 689,908.

[0011] The (per) fluoropolyether-based ionomer polyurethanes have a fluorine content preferably higher than 15% by weight, more preferably higher than 25% by weight, still more preferably higher than 35% by weight, and contain in their structure hydrophilic ionic groups of cationic nature, wherein the cationic groups can be present as side groups and/or in the chain, the side groups being separated from the polymer chain by a bivalent alkylene radical $((R)_a)_{zl}$, wherein zl is an integer equal to one or zero, a is an integer from 1 to 20, preferably from 3 to 10, R being of the CR_1R_2 , $Y(CR_1R_2)_b$ type wherein:

Y is a linking bivalent radical, different from CR_1R_2 , preferably $-COO-$, $-CONH-$, $-OCONH-$, $-O-$; b is an integer from 0 to 20; R_1 and R_2 , equal to or different from each other, are: H, aliphatic radicals having from 1 to 10 carbon atoms, cycloaliphatic radicals having from 5 to 20 carbon atoms, aromatic having from 6 to 20 carbon atoms, the cyclic radicals can optionally contain heteroatoms.

[0012] The ionomer polyurethanes are obtained by polymerization in two steps according to known various processes which have in common the following steps:

- a first step, wherein a fluorinated diisocyanate prepolymer is prepared by reacting with hydrogenated diisocyanates

in organic solvents of polar type, for example ketones and acetates, bifunctional (per)fluoropolyethers having alcoholic or acid functionality, optionally mixed with hydrogenated macrodiols.

a second step, which depending on the processes consists of:

I) partial chain extension by chain extenders such as diols or diamines (C₂-C₁₂) and ionomers, described in the above mentioned prior art which is herein incorporated by reference, then subsequent dispersion in water and salification with polymerization completion by formation of ureic bonds;

or

II) insertion of ionomers and then salification, dispersion and polymerization by chain extension in water in the presence of diamines;

or


III) insertion of ionomers and completion of the chain extension in solvent to obtain the polymer having the desired molecular weight, and contemporaneous dispersion and salification in water of the so obtained polymer;

alternatively the polymer can be first salified and then dispersed in water.

[0013] The hydrogenated macrodiols are for example saturated or unsaturated C₂-C₄ polyoxyalkylenes, for example PTMEG (polytetramethylenglycol), PEG (polyethylenglycol), PPG (polypropylenglycol), PBDH (polybutadienglycol), polyesters obtained by polycondensation of aliphatic anhydrides of dicarboxylic acids having from 4 to 9 carbon atoms with aliphatic C₂-C₈ diols, alone or in admixture, ex. PCL (polycaprolactonediol).


[0014] The fluorinated polyurethanes according to the present invention contain in the chain units derived from ionomers such as for example the following:

a. diols containing a substituted aminic group, having formula:

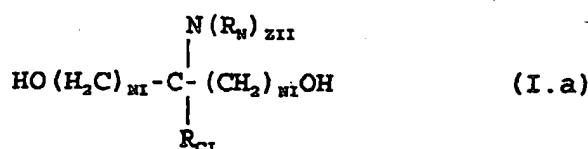

wherein R_N is a linear or branched C₁-C₆ alkyl, zII is 1 or 2, when zII = 1 the nitrogen free valence is saturated with one H atom, R_{CI} is H or C₁-C₄, alkyl, NI ranges from 1 to 4;

b. tertiary alkyldialkanolamines of formula




wherein R_N and NI have the above mentioned meanings; examples of said amines are methyldiethanolamine, butyldiethanolamine, methyldiisopropanolamine, or

c. the ionomers corresponding for example to the formula:




wherein T is an alkylene radical with a number of carbon atoms from 1 to 20 and has the meaning of R₁, X = N(R₁)₂, R has the above mentioned meaning of R₁; or


d. diol compounds containing substituted aminic groups corresponding to the following formulae:



wherein R has the above mentioned meaning of R₁



wherein R has the above mentioned meaning of R₁

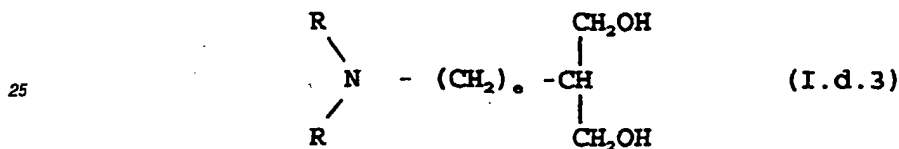

e is an integer from 1 to 10.

[0015] The PFPEs contained in ionomer fluorinated polyurethanes are used in the synthesis of these polymers in the first step of the above described synthesis method; said PFPEs have average number molecular weight in the range 500-4.000, preferably 1.000-2.000, and contain repeating units selected from the following:

(CF(CF₃)-CF₂O), (CF₂CF₂O), (CF₂(CF₃)O), (CF₂-CF(CF₃)O), (CF₂CF₂CF₂O), (CF₂CF₂CH₂O), said units being statistically distributed in the polymer chain.

[0016] In particular they belong to one or more of the following classes:

- 1) -O(CF(CF₃)-CF₂O)_n (CF(CF₃)O)_m (CF₂O)_p-
having a random distribution of the perfluorooxyalkylene units and n, m, p are integers and have average values such as to meet the above previously mentioned requirements of average molecular weight;
- 2) -O(CF₂CF₂O)_n (CF₂O)_m-
with random distribution of the perfluorooxyalkylene units, m' and n' are integers such as to meet the above mentioned requirements of molecular weight;
- 3) -O(CF₂CF₂O)_n (CF₂O)_m (CF(CF₃)O)_p (CF(CF₃)-CF₂O)_o-
wherein m, n, p, o are integers such as to meet the above mentioned requirements of molecular weight;
- 4) -O(CF₂-CF(CF₃)O)_t-
wherein t is an integer such as to meet the mentioned requirements of molecular weight;
- 5) -O(CF₂CF₂CF₂O)_s- or -O(CF₂CF₂CH₂O)_s-
wherein s is an integer such as to meet the above mentioned requirements of molecular weight.

[0017] Preferably the repeating units in the PFPEs of the ionomer polyurethanes have the structure 1).

[0018] The ionomer fluorinated polyurethanes have a fluorine content preferably in the range 30-40% by weight.

[0019] The polymer salification is carried out with organic or inorganic acids such as hydrochloric, phosphoric, formic, acetic, lactic acid, etc. or by carrying out the nitrogen quaternization with alkylating agents known in the art, for example methyl iodide, dimethylsulphate, benzyl bromide, etc.

[0020] Said salts are prepared by adding the acid to the reaction solution containing the polyurethane in a mixed aqueous/organic solvent, wherein the organic solvent is partially or totally soluble with water, for example ethyl acetate.

[0021] The so prepared aqueous dispersions of the polyurethanes are generally stable to sedimentation during the time, also in the absence of surfactants and/or protective colloids. Optionally, if necessary, non ionic surfactants, such as ethoxylated derivatives of alcohols having a linear C₁₂-C₂₀ chain or alkylphenols, in amounts in the range 0.01-1.5% by weight with respect to the polymer, can be added to the dispersion; also cosolvents, more specifically polar solvents such as propylene glycol, N-methylpyrrolidone in amounts not higher than 10% by weight with respect to the polymer, can be added.


[0022] The preferred component A) fluorinated (meth)acrylic (co)polymers are formed of monomers comprising perfluoroalkyl groups preferably with C₃-C₃₀ chain, or (per)fluoropolyether groups preferably having a chain from 4 to 30 carbon atoms; optionally one or more sulphonamide groups; hydrogenated (meth)acrylic monomers known in the art, and cationic (meth)acrylic ionomer monomers.

[0023] As examples of these monomers reference is preferably made to the formulae (I), (II), (III) and (IV) reported below, wherein the substituents have the mentioned meanings.

[0024] These fluoro(meth)acrylate copolymers are for example described in the patents USP 2,803,615, 2,839,513, 2,995,542, 3,814,741, 3,356,628, 3,536,749, 4,525,423, 4,529,658, EP 622,653 and EP 870,778 as precursor acrylic monomers.

[0025] Said copolymers can be prepared for example by emulsion polymerization, in the presence of an emulsifier, catalyst and chain transfer agent as described for example in USP 4,525,423, herein incorporated by reference. For example the fluoroacrylated copolymers can be obtained by using the following monomers:

a) from 1 to 30% by weight of monomers or mixtures thereof having formula



wherein

R¹ is a C₁-C₂₀ alkyl, cycloalkyl, haloalkyl, halocycloalkyl group (halo = Cl, Br);

R² is a C₁-C₆ alkylene or haloalkylene group, each R² group can be equal to or different from the other R² groups, at least one R¹ or R² group contains an halogen atom,

nII is an integer from zero to 10, with the proviso that when n is zero R¹ is a C₁-C₁₆ haloalkyl or halocycloalkyl group;

mII is zero or 1;

b) from 60 to 80% of monomers or mixtures thereof having formula



wherein

R_{II} is a fluoroalkyl radical with C₃-C₃₀, preferably C₃-C₂₀, carbon atoms or it is a PFPE (per)fluoropolyether radical containing the above mentioned units and having a number of carbon atoms from C₅ to C₃₀;

pI is 1 or 2;


Q is a linking bridge, divalent or trivalent, e.g., aliphatic from 1 to 12 carbon atoms, or a C₆-C₁₂ aromatic group;

Q can optionally contain heteroatoms such as N, O, S or carbonylimino, sulphonylimino or carbonyl groups; Q

can be unsubstituted or is linked to substituents selected from the following: halogen atoms, hydroxyl groups,

C₁-C₆ alkyl radicals; Q preferably does not contain double or triple bonds; preferably Q is selected from the following radicals: -CH₂·, -C₂H₄·, -SO₂N(R⁵)C₂H₄·, -SO₂N(R⁵)CH₂CH(CH₃)·, C₂H₄SO₂N(R⁵)C₄H₈·, R⁵ is H or a C₁-C₄ alkyl;

c) from 0 to 15%, preferably from 1 to 15% of monomers or mixtures thereof having formula



wherein R³ is H or methyl;

d) from 1 to 6% of cationic monomers, or mixtures thereof, of formula



wherein R^4 is H or methyl,

the Z_{IV} group is a divalent electron attracting group and has a carbonyl or aromatic group or an oxygen or sulphur atom directly linked to the monomer vinylidene radical; the Z_{IV} group can be preferably selected from the following:

$-\text{COOCH}_2\text{CH}(\text{OH})\text{CH}_2-$, $-\text{COO}(\text{CH}_2)_{\text{kIV}}-$, $-\text{CONH}(\text{CH}_2)_{\text{kIV}}$, wherein kIV is an integer from 2 to 6;

Y_{IV}^+ is a monovalent organic cation and comprises (a) the pyridinium ion, (b) the $\text{N}^+(\text{R}^6)_3$ ion wherein each R^6 is independently H or a C_1 - C_4 alkyl group, or two of any R^6 combine to form a C_4 - C_5 alkylene group, or two of any R^6 are $-(\text{CH}_2)_2-$ and combine with an oxygen atom to give the structure $-(\text{CH}_2)_2-\text{O}-(\text{CH}_2)_2-$, (c) phosphonium ions and (d) sulphonium ions; preferably Y_{IV}^+ is $\text{N}^+(\text{R}^6)_3$ wherein R^6 is as above defined;


X^- is an anion, preferably an halide (Cl, Br, I) or an alkyl sulphate;

e) from 0 to 20% of monomers containing at least a double bond, such as for example maleic anhydride, acrylonitrile, vinyl acetate, vinylchloride, vinyl fluoride, vinylidene fluoride, vinylidene cyanide, vinyl chloroacetate, vinyl silicon, ethylene, styrene, alkyl styrenes, halogenated styrenes, methacrylonitrile, N-vinyl carbazole, vinyl pyridine, vinyl alkyl ethers, vinyl alkyl ketones isoprene, butadiene, chloroprene, fluoroprene, and mixtures thereof.

[0026] The preferred monomers of group a) are the esters (halo)alkyl and (halo)cycloalkyl of the (meth)acrylic acid, halo = Cl, Br, from 1 to 20 carbon atoms.

[0027] The preferred monomers of group b) are those containing C_4 - C_{12} perfluoroalkyl chains, still more preferably containing the sulphonamide group, such as for example $\text{C}_8\text{F}_{17}\text{SO}_2\text{N}(\text{CH}_3)\text{CH}_2\text{CH}_2\text{OCOCH}=\text{CH}_2$; when R_1 is based on PFPE, $\text{T}(\text{C}_3\text{F}_5\text{O})_m(\text{CF}_2\text{O})_n\text{CF}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OCOC}(\text{CH}_3)=\text{CH}_2$, wherein T = perfluoroalkyl C_1 - C_3 , can be mentioned, optionally one or more atoms of F of T , generally one F atom, are substituted by H and/or Cl; m and n are as above defined.

[0028] The monomers usable in the group b) can also have the structures corresponding to the general formula:



wherein T' , n and m' have the above mentioned meanings, q is an integer from 0 to 1, A is a bivalent radical, preferably of linear aliphatic type $(\text{CH}_2)_{m'0}$ wherein $m'0$ is an integer from 1 to 20, or (alkylen)cycloaliphatic, (alkylen)aromatic type. A optionally can contain heteroatoms in the ring or in the alkylene chain, or it can be both a linear and branched polyalkylenoxy chain, in particular containing repeating units of the $\text{CH}_2\text{CH}_2\text{O}$, $\text{CH}_2\text{CH}(\text{CH}_3)\text{O}$, $(\text{CH}_2)_3\text{O}$, $(\text{CH}_2)_4\text{O}$ type. A can also contain groups of amidic, ester, ether, COO type, of sulphide, iminic type; the carbon atom number of the cycloaliphatic compounds being from 3 to 20, for the aromatic ones from 6 to 20; the group A can also be a combination of the mentioned types; the bond group of A with the perfluoromethylene group of the fluorinated chain can be for example: $-\text{C}-$, $-\text{O}-$, $-\text{CONR}-$ (R is H, alkyl, cycloaliphatic or aromatic groups having less than 15 carbon atoms), $-\text{CO}_2-$, $-\text{COS}-$, $-\text{CO}-$, one heteroatom, or the triazinic or heterocyclic aromatic groups having 5 or 6 atoms containing 2 or more heteroatoms equal to or different from each other; T_0 is $-\text{COOCH}=\text{CH}_2$, $-\text{COOCH}_2\text{CH}=\text{CH}_2$.

[0029] The aqueous dispersions according to the present invention are prepared by adding to the aqueous dispersions of the fluorinated polyurethanes, optionally containing the indicated additives, the aqueous dispersions of the fluoroacrylates, in the required weight ratios.

[0030] The fluoroacrylate aqueous dispersions, for example Scotchgard® by 3M®, are available on the market.

[0031] As said, the aqueous dispersions of the present invention are used for the treatment of textiles, specifically natural fiber textiles, for example cotton, silk, wool; synthetic fibers, e.g., acrylic, polyamide, polyester fibers, etc.

[0032] The aqueous dispersions of the present invention are used as such or diluted, depending on the type of application technique on textiles. The application technique are the known ones, for example by spreading, by immersion and subsequent mechanical removal of the polymer excess deposited on the textiles, by spray or roll application.

[0033] For example when the application is made by spreading, the dispersion can be formulated by adding additives such as thickening agents, optionally together with the other conventional excipients of these formulations. In the immersion or spray application the dispersion is diluted with deionized water depending on the desired use.

[0034] Tests carried out by the Applicant (see the Examples) have shown that the aqueous dispersions containing the sole component A) fluoroacrylic copolymers confer to textiles good hydro- and oil-repellent properties when said

dispersions have concentrations equal to or higher than a specific value, which depends on the treated substratum. With these dispersions however it is not possible to obtain a textile satisfactory softness.

[0035] On the contrary by using an aqueous dispersion according to the present invention, containing a mixture of fluoroacrylates and polyurethanes in the ratios according to the present invention, the textile softness remains unchanged in comparison with the untreated sample and the hydro- and oil-repellent properties are maintained or improved.

[0036] It has been found that the dispersions of the invention always show high hydro- oil-repellence values also when the amount of the fluoroacrylic component A) is such that if it was used alone, in the absence of the component B), would give very low hydro- oil-repellence values. This is surprising since the fluoroacrylic polymer concentration in the mixture is lower than that which allows to obtain the same hydro- oil-repellence degree.

[0037] It is still more surprising that the hydro- oil-repellence values of the compositions of the invention remain at high values even using the component B) polyurethane which as such has lower hydro- oil-repellence values than the component A).

[0038] Therefore the mixture of the two polymers has a synergic effect both as regards the textile hydro- oil-repellence treatment and the softness.

[0039] Furthermore it has been unexpectedly found that the hydro- and oil-repellence and softness properties using the dispersion of the invention are maintained even after various textile washings. Tests carried out by the Applicant have shown that after 4 washings in water the treated textiles show substantially unchanged properties. Also washings of textiles treated with detergents do not show meaningful changes with the number of washings.

[0040] The following examples are to be considered for illustrative purposes and they cannot be deemed as limitative of the scope of the present invention.

EXAMPLE 1a

Hydro-repellence test

[0041] The test is carried out by contacting the textiles for 10 seconds with a drop of hydroalcoholic water/isopropanol (IPA) mixture having a rising concentration in alcohol, using at the end a drop of pure alcohol. After drop removal, it is noticed if the liquid leaves a surface halo or if it penetrates the weft. The assigned hydro-repellence value is the number which corresponds to the liquid which is neither penetrated nor has left halo on the textiles.

rating	Water/IPA % by weight mixture
W	100/0
1	90/10
2	80/20
3	70/30
4	60/40
5	50/50
6	40/60
7	30/70
8	20/80
9	10/90
10	0/100

[0042] The sample to be tested passes the test if the hydro-repellence value is at least 4. W means that the sample resists only water. 0 means that the water drop is immediately absorbed.

EXAMPLE 1bOil-repellence test

- 5 [0043] The test is carried out according to the method AATCC Standard test 118-1978, wherein the resistance opposed by the textiles to the penetration of a drop of oils having different surface tension is evaluated. The drop is contacted with the textiles for 30 seconds and then removed. One ascertains if the oil leaves a surface halo or if it penetrates the weft. The assigned oil-repellence value is the number which corresponds to the oil which is neither penetrated nor has left halo on the textiles.

10

15

20

25

rating	oil
1	vaseline oil
2	vaseline oil/hexadecane 65/35
3	n-hexadecane
4	n-tetradecane
5	n-dodecane
6	n-decane
7	n-octane
8	n-heptane

[0044] The sample to be tested passes the test if the oil-repellence value is at least 4. 0 means that the vaseline oil is immediately absorbed.

30

EXAMPLE 1c

Evaluation of the softness degree of the treated textiles by comparison with the sample not treated with the invention aqueous dispersion.

35

[0045] The sample softness to the touch before and after the treatment is evaluated. The evaluation is carried out on 10 samples according to the following scale:

- 3 : the sample after treatment remains unchanged to the touch.
 40 2 : the sample after treatment is less soft, slightly stiff.
 1 : the sample after treatment appears changed to the touch and is evidently stiffer than the initial textiles.

The results represent the average value of the marks assigned to each of the 10 samples.

[0046] The sample passes the test if the assigned mark is at least 2, preferably higher.

45

[0047] On some samples the above described tests are repeated after washing by immersion for a time of about 30 minutes in 150 ml of deionized water under stirring.

EXAMPLE 2

50

Synthesis of a cationic polyurethane

- [0048] 250 g of a (per)fluoropolyether diol having hydroxyl equivalent weight 990 are dropped, in 1 hour, in a 1 liter flask equipped with reflux and dropping funnel, heated by an oil bath, containing a mixture thermostated at 80°C formed of 56.14 g of isophorone diisocyanate, 137 g of ethyl acetate and 0.9 ml of a 20% solution by weight of dibutyl tin dilaurat in ethyl acetate. When the addition of (per)fluoropolyether diol is over, the mixture is let react for two hours at 80°C. At the end it is cooled to 60°C and a solution in 183 g of ethyl acetate of the following reactants is added by means of a dropping funnel:

55

- 7.5 g of N-methyldiethanolamine (N-MDEA) (hydroxyl equivalent weight 59.58, 0.128 eq.).
- 5.67 g of butandiol (hydroxyl equivalent weight 45, 0.128 eq.).
(ratio by moles N-MDEA : butandiol 1 : 1).

5 [0049] The final solution has a dry product content of 50% by weight. It is heated to 80°C, maintaining this temperature until the reaction is over, which is determined by IR analysis from the disappearance of the signal connected to the NCO group. It is cooled to room temperature and a solution formed of 4.15 g of glacial acetic acid and 80 g of isopropyl alcohol is added. It is left under stirring for one hour at room temperature by adding at the end deionized water in such amount as to obtain a dry product content within the desired limits. The solvents (ethyl acetate and isopropanol) are distilled until a residual amount of organic solvent in the aqueous dispersion lower than 1% is obtained. The final aqueous dispersion has a content, determined as dry residue, of 30% by weight.

EXAMPLE 3

15 Synthesis of a cationic polyurethane

[0050] 250 g of a (per)fluoropolyether diol having hydroxyl equivalent weight 990 are dropped, in 1 hour, in a 1 liter flask equipped with reflux and dropping funnel, heated by an oil bath, containing a mixture thermostated at 80°C formed of 56.14 g of isophorone diisocyanate, 137 g of ethyl acetate and 0.9 ml of a 20% solution by weight of dibutyl tin dilaurate in ethyl acetate. When the addition of (per)fluoropolyether diol is over, the mixture is let react for two hours at 80°C. At the end it is cooled to 60°C and a solution in 183 g of ethyl acetate of the following reactants is added by means of a dropping funnel in the global time of one hour:

- 7.5 g of N-methyldiethanolamine (N-MDEA) (hydroxyl equivalent weight 59.58, 0.128 eq.).
- 25 - 9.09 g of 1,4-cyclohexyldimethanol (CHDM) (hydroxyl equivalent weight 72.11, 0.128 eq.).
(ratio by moles N-MDEA : CHDM 1 : 1).

[0051] The final solution has a dry product content of 50% by weight. It is heated to 80°C, maintaining this temperature until the reaction is over, which is determined by IR analysis by the disappearance of the signal connected to the NCO group. It is cooled to room temperature and a solution formed of 4.15 g of glacial acetic acid and 80 g of isopropyl alcohol is added. It is left under stirring for one hour at room temperature by adding at the end deionized water in such amount as to obtain a dry product content within the desired limits. The solvents (ethyl acetate and isopropanol) are distilled until a residual amount of organic solvent in the aqueous dispersion lower than 1% is obtained. The final aqueous dispersion has a dry product content of 30% by weight.

EXAMPLE 4

Synthesis of a cationic polyurethane

40 [0052] 250 g of a (per)fluoropolyether diol having hydroxyl equivalent weight 990 are dropped, in 1 hour, in a 1 liter flask equipped with reflux and dropping funnel, heated by an oil bath, containing a mixture thermostated at 80°C formed of 56.14 g of isophorone diisocyanate, 137 g of ethyl acetate and 0.9 ml of a 20% solution by weight of dibutyl tin dilaurate in ethyl acetate. When the addition of (per)fluoropolyether diol is over, the mixture is let react for two hours at 80°C. At the end it is cooled to 60°C and a solution in 183 g of ethyl acetate of the following reactants is added by means of a dropping funnel, in the global time of one hour:

- 7.5 g of 3-dimethylamino-1,2-propandiol (hydroxyl equivalent weight 59.58, 0.128 eq.).
- 9.09 g of 1,4-cyclohexyldimethanol (CHDM) (hydroxyl equivalent weight 72.11, 0.128 eq.).

50 [0053] A final solution having a dry product content of 50% by weight is obtained. It is heated to 80°C, maintaining this temperature until the reaction is over, which is determined by IR analysis from the disappearance of the signal connected to the NCO group. It is cooled to room temperature and a solution formed of 4.15 g of glacial acetic acid and 80 g of isopropyl alcohol is added. It is left under stirring for one hour at room temperature by adding at the end deionized water in such amount as to obtain a dry product content within the desired limits. The solvents (ethyl acetate and isopropanol) are distilled until a residual amount of organic solvent in the aqueous dispersion lower than 1% is obtained. The final aqueous dispersion has a dry product content of 30% by weight.

APPLICATION EXAMPLES

EXAMPLE 5 (comparative)

- 5 [0054] Portions of the aqueous dispersion of the cationic polyurethane of Example 2 are diluted with deionized water in order to obtain two dispersions, having a final concentration of 0.8 and 1.2% by weight respectively, said final concentrations regulated determining the dispersion dry residue.
- [0055] The used textiles are polyester/cotton 65/35 and the specimen has 5 x 5 cm sizes. The treatment is carried out by dipping the samples in 10 ml of each dispersion for 1 minute. The treated specimen is taken away from the bath and mechanically treated to remove the dispersion excess. It is dried in a stove at 150°C for 2 minutes and then the tests described in Examples 1a, 1b and 1c are carried out.
- 10 [0056] Each specimen is subsequently washed by dipping for a time of about 30 minutes in 150 ml of deionized water, under stirring. At the end the specimen are recovered and treated as above described, and subjected again to tests 1a and 1b.
- 15 [0057] The test results are reported in Table 1 and show that the textiles treated with the cationic polyurethane of Example 2 have unsatisfactory hydro- and oil-repellence values.

EXAMPLE 6 (comparative)

- 20 [0058] Portions of the aqueous dispersion of fluoroacrylate polymers Scotchgard® FX 3569(3M®), are diluted with deionized water so as to obtain dispersions having final concentrations 0.2, 0.4, 0.6, 0.8 and 1.2% by weight respectively.
- [0059] The used textiles, the number of the used specimen for each tested dispersion and the effected treatments are the same as described in Example 2.
- 25 [0060] The test results are reported in Table 1 and show that the specimen treated with the diluted aqueous dispersions obtained from the one to be tested, have satisfactory hydro- and oil-repellence values with dispersion concentrations equal to or higher than 0.81 by weight. It is noticed that the specimen softness in comparison with the untreated textiles becomes worse at all the tested concentrations.

30 EXAMPLE 7

- [0061] Three mixtures are prepared, formed of the aqueous dispersion of cationic polyurethane of Example 2 and of the aqueous dispersion Scotchgard® FX 3569 (3M®) in ratios by weight calculated on the dry part of each dispersion, of 60/40, 50/50 and 40/60 respectively. Dilutions with deionized water are then effected so as to obtain dispersions having a final concentration 0.2, 0.4, 0.6 and 1.2% by weight for each of the three mixtures.
- 35 [0062] The used textiles, the number of the used specimen for each tested dispersion and the treatments carried out are the same as described in Example 2. The test results are reported in Table 1 and show that the specimen treated with the three mixtures to be tested pass the hydro- and oil-repellence test at the global concentration of dry product of 1.2% by weight and that at the same concentration the textile specimen softness remains substantially unchanged with respect to the starting textiles. Furthermore the textile appearance, in terms of colour and gloss, is not substantially changed with respect to the textiles as such.
- 40

EXAMPLE 8

- 45 [0063] Three mixtures are prepared, formed of the aqueous dispersion of cationic polyurethane of Example 3 and of the aqueous dispersion Scotchgard® FX 3569 (3M®) in ratios by weight calculated on the dry part of each dispersion, of 60/40, 50/50 and 40/60 respectively. Dilutions with deionized water are then effected so as to obtain dispersions having a final concentration of 1.2% by weight of dry product for each of the three mixtures.
- [0064] The used textiles, the number of the used specimen for each tested dispersion and the treatments carried out are the same as described in Example 2. The test results are reported in Table 1 and show that the specimen treated with the three mixtures to be tested at the indicated dry concentration pass the tests. Furthermore the textile appearance, in terms of colour and gloss, is not substantially changed with respect to the textiles as such.
- 50

EXAMPLE 9

- 55 [0065] A portion of the aqueous dispersion of the polyurethane obtained in Example 4 is diluted, by adding deionized water, until an aqueous dispersion having a final dry concentration of 1.2% w/w, is obtained. A portion of the diluted dispersion is mixed with an equal weight of the dispersion having 12% of dry product Scotchgard FX 3569 (3M®) pre-

pared in Example 6, obtaining an aqueous dispersion of the two polymers 50/50 by weight of each polymer on the total dry product, with global concentration of dry product of 1.2%.

[0066] The used textiles and the effected treatments are the same as described in Example 2.

[0067] The test results are reported in Table 1 and show that the specimen treated with the dispersion formed of the 50/50 mixture prepared as above described, at the above mentioned dry product concentration, pass all the three tests. Besides the textile appearance, in terms of colour and gloss, is not substantially changed with respect to the textile as such.

EXAMPLE 9a (comparative)

[0068] A portion of the aqueous dispersion of the polyurethane obtained in Example 3 is diluted, by adding deionized water, until an aqueous dispersion having a final concentration of dry product of 1.2% w/w, is obtained.

[0069] The test results are reported in Table 1 and show that the specimen treated with the polyurethane dispersion give the same results as in the previous Example 5, passing only the softness test.

Table 1

Results of the hydro-repellence tests (Ex. 1a), oil-repellence (Ex. 1b) and softness (Ex. 1c) of textile samples treated with the invention dispersions diluted at the dry concentrations reported in the Table. In the first column: B) indicates the polyurethane fluorinated component and -A) the fluoroacrylate; the number fractions are ratios by weight B)/A)						
Ex.	disp. conc. %	Test Ex. 1a	Test Ex. 1b	After washing		Test Ex. 1c
				Test Ex. 1a	Test Ex. 1b	
Ex. 5	0.8	2	2	2	2	-
B)	1.2	2	2	2	2	-
Ex. 6	0.2	0	0	W	0	1
A)	0.4	0	1	2	2	1
	0.6	2	3	3	3	1
	0.8	4	4	5	5	1
	1.2	5	5	5	5	1
Ex. 7	0.2	0	0	1	1	-
60/40	0.4	W	1	2	3	-
B)/A)	0.6	2	3	2	4	-
	1.2	4	5	4	5	3
50/50	0.2	0	0	W	1	-
	0.4	0	1	2	3	-
	0.6	2	3	2	4	-
	1.2	4	5	4	5	3
40/60	0.2	0	0	W	1	-
	0.4	0	1	2	3	-
	0.6	2	2	2	3	-
	1.2	6	5	6	5	3
Ex. 8						
60/40	1.2	4	5	4	5	3
50/50	1.2	4	5	4	5	3
40/60	1.2	5	5	5	5	3
Ex. 9	1.2	5	5	5	4	3

Table 1 (continued)

Results of the hydro-repellence tests (Ex. 1a), oil-repellence (Ex. 1b) and softness (Ex. 1c) of textile samples treated with the invention dispersions diluted at the dry concentrations reported in the Table. In the first column: B) indicates the polyurethane fluorinated component and -A) the fluoroacrylate; the number fractions are ratios by weight B)/A)						
Ex.	disp. conc. %	Test Ex. 1a	Test Ex. 1b	After washing		Test Ex. 1c
				Test Ex. 1a	Test Ex. 1b	
50/50 Ex. 9a B)	1.2	2	2	n.d.	n.d.	-

Claims

1. Compositions formed of aqueous dispersions comprising a mixture of the following fluorinated polymers:

A) (meth)acrylic (co)polymers containing fluorine, and
B) cationic ionomers of fluorinated polyurethanes based on (per)fluoropolyethers,

the weight ratio A):B), calculated on the dry product, being in the range 70:30 and 30:70, preferably 60:40 and 40:60, with the proviso that component A) must not be lower than about 0.5% by weight as dry product in the dispersion.


2. Compositions according to claim 1, wherein component B) is present in the dispersion at a concentration of about 0.4% by weight, more preferably 0.5%.

3. Compositions according to claims 1-2, wherein the aqueous dispersions have a concentration in the range 0.7-3% w/w, preferably 0.8-1.5% w/w, still more preferably 0.9-1.3% w/w, as dry residue.

4. Compositions according to claims 1-3, wherein the polyurethanes have a fluorine content higher than 15% by weight, more preferably higher than 25% by weight, still more preferably higher than 35% by weight, and contain in their structure hydrophilic ionic groups of cationic nature, wherein the cationic groups can be present as side groups and/or in chain, the side groups being separated from the polymer chain by a bivalent alkylene radical $((R)_a)_{zl}$, wherein zl is an integer and is one or zero, a is an integer from 1 to 20, preferably from 3 to 10, R being of the CR_1R_2 , $Y(CR_1R_2)_b$ type wherein: Y is a linking bivalent radical, different from CR_1R_2 , preferably $-COO-$, $-CONH-$, $-OCONH-$, $-O-$; b is an integer from 0 to 20; R_1 and R_2 , equal to or different from each other, are: H, aliphatic radicals having from 1 to 10 carbon atoms, cycloaliphatic radicals having from 5 to 20 carbon atoms, aromatic having from 6 to 20 carbon atoms, the cyclic radicals can optionally contain heteroatoms.


5. Compositions according to claim 4, wherein the fluorinated polyurethanes contain in the chain the following units derived from ionomers:

a. diols containing a substituted aminic group, having formula:

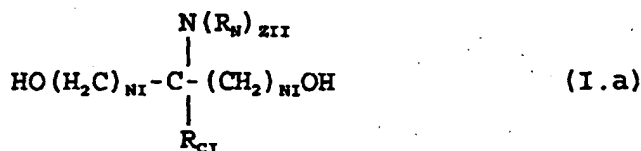


wherein R_N is a linear or branched C_1-C_6 alkyl, zII is 1 or 2, when $zII = 1$ the nitrogen free valence is saturated with one H atom, R_{CI} is H or C_1-C_4 alkyl, NI ranges from 1 to 4;


b. tertiary alkyldialkanolamines of formula




wherein R_N and NI have the above mentioned meanings; or
c. ionomers of formula:




wherein T is an alkylene radical with a number of carbon atoms from 1 to 20 and has the meaning of R_1 , $\text{X} = \text{N}(\text{R}_1)_2$, R has the above mentioned meaning of R_1 ; or
d. diolic compounds containing substituted aminic groups:



wherein R has the above mentioned meaning of R_1




wherein R has the above mentioned meaning of R_1 ,

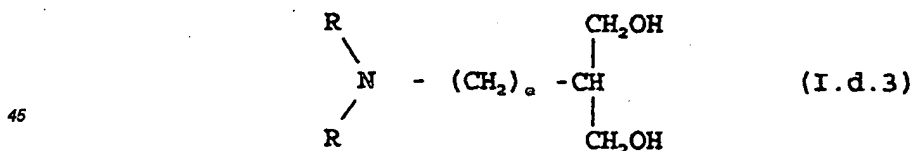


e is an integer from 1 to 10.

6. Compounds according to claims 4-5, wherein the PFPEs contained in the ionomer fluorinated polyurethanes have average number molecular weight in the range 500-4.000, preferably 1.000-2.000, and contain repeating units selected from the following:
 $(\text{CF}(\text{CF}_3)-\text{CF}_2\text{O})$, $(\text{CF}_2\text{CF}_2\text{O})$, $(\text{CF}_2(\text{CF}_3)\text{O})$, $(\text{CF}_2-\text{CF}(\text{CF}_3)\text{O})$, $(\text{CF}_2\text{CF}_2\text{CF}_2\text{O})$, $(\text{CF}_2\text{CF}_2\text{CH}_2\text{O})$, said units being statistically distributed in the PFPE polymer chain.
7. Compositions according to claim 6, wherein the PFPE repeating units belong to one or more of the following classes:



having a random distribution of the perfluorooxyalkylene units and n, m, p are integers and have average values such as to meet the above previously mentioned requirements of average molecular weight;




with random distribution of the perfluorooxyalkylene units, m' and n' are integers such as to meet the above mentioned requirements of molecular weight;



wherein m, n, p, o are integers such as to meet the above mentioned requirements of molecular weight; 4)



wherein t is an integer such as to meet the above mentioned requirements of molecular weight;



wherein s is an integer such as to meet the above mentioned requirements of molecular weight.

8. Compositions according to claim 7, wherein the PFPE repeating units of the ionomer polyurethanes have the structure 1).

9. Compositions according to claims 4-8, wherein the ionomer fluorinated polyurethanes have a fluorine content in the range 30-40% by weight.


10. Compositions according to claims 1-9, wherein component B) is salified with organic or inorganic acids or nitrogen quaternization is carried out with conventional alkylating agents.

11. Compositions according to claims 1-10, wherein to the dispersion non ionic surfactants, in amounts in the range 0.01-1.5% by weight with respect to the polymer and co-solvents, preferably polar solvents in amounts not higher than 10% by weight with respect to the polymer and/or protective colloids, are added.

12. Compositions according to claims 1-11, wherein component A) fluorinated (meth)acrylic (co)polymers are formed of monomers comprising perfluoroalkyl groups preferably with C₃-C₃₀ chain, or (per)fluoropolyether groups preferably having a chain from 4 to 30 carbon atoms; optionally one or more sulphonamide groups; conventional hydrogenated (meth)acrylic monomers, and cationic (meth) acrylic ionomer monomers.

13. Compositions according to claim 12, wherein the monomers of component A) are selected from the following:

a) from 1 to 30% by weight of monomers or mixtures thereof having formula



wherein

R¹ is a C₁-C₂₀ alkyl, cycloalkyl, haloalkyl, halocycloalkyl group (halo = Cl, Br);

R² is a C₁-C₆ alkylene or haloalkylene group, each R² group can be equal to or different from the other R² groups, at least one R¹ or R² group contains an halogen atom,

nII is an integer from zero to 10, with the proviso that when n is zero R¹ is a C₁-C₁₆ haloalkyl or halocycloalkyl group;

mII is zero or 1;

b) from 60 to 80% of monomers or mixtures thereof having formula




wherein

R_{11} is a fluoroalkyl radical with C_3 - C_{30} carbon atoms; preferably C_3 - C_{20} . r it is a PFPE (per)fluoropolyether radical containing the above mentioned units and having a number of carbon atoms from C_5 to C_{30} ;

pl is 1 or 2;


Q is a linking bridge, divalent or trivalent, e.g., aliphatic from 1 to 12 carbon atoms, or a C_6 - C_{12} aromatic group; Q can optionally contain heteroatoms such as N, O, S or carbonylimino, sulphonylimino or carbonyl groups; Q can be unsubstituted or is linked to substituents selected from the following: halogen atoms, hydroxyl groups, C_1 - C_6 alkyl radicals; Q preferably does not contain double or triple bonds; preferably Q is selected from the following radicals: $-CH_2-$, $-C_2H_4-$, $-SO_2N(R^5)C_2H_4-$, $-SO_2N(R^5)CH_2CH(CH_3)-$, $-C_2H_4SO_2N(R^5)C_4H_8-$, R^5 is H or a C_1 - C_4 alkyl;

c) from 0 to 15%, preferably from 1 to 15% of monomers or mixtures thereof having formula



wherein R^3 is H or methyl;

d) from 1 to 6% of cationic monomers, or mixtures thereof, of formula



wherein R^4 is H or methyl,

the Z_{IV} group is a divalent electron attracting and has a carbonyl or aromatic group or one oxygen or sulphur atom directly linked to the monomer vinylidene radical; the Z_{IV} group can be preferably selected from the following:

$-\text{COOCH}_2\text{CH}(\text{OH})\text{CH}_2-$, $-\text{COO}(\text{CH}_2)_{kIV}-$, $-\text{CONH}(\text{CH}_2)_{kIV}-$ wherein kIV is an integer from 2 to 6;


Y_{IV}^+ is a monovalent organic cation and comprises (a) the pyridinium ion, (b) the $N^+(R^6)_3$ ion wherein each R^6 is independently H or a C_1 - C_4 alkyl group, or two of any R^6 combine to form a C_4 - C_5 alkylene group, or two of any R^6 are $-(CH_2)_2-$ and combine with an oxygen atom to give the structure $-(CH_2)_2-O-(CH_2)_2-$, (c) phosphonium ions and (d) sulphonium ions; preferably Y_{IV}^+ is $N^+(R^6)_3$ wherein R^6 is as above defined;

X is an anion, preferably an halide (Cl, Br, I) or an alkyl sulphate;


e) from 0 to 20% of monomers containing at least a double bond, such as for example maleic anhydride, acrylonitrile, vinyl acetate, vinylchloride, vinyl fluoride, vinylidene fluoride, vinylidene cyanide, vinyl chloroacetate, vinyl silicone, ethylene, styrene, alkyl styrenes, halogenated styrenes, methacrylonitrile, N-vinyl carbazol, vinyl pyridine, vinyl alkyl ethers, vinyl alkyl ketones isoprene, butadiene, chloroprene, fluoroprene, and mixtures thereof.

14. Compositions according to claim 13, wherein the monomers of group a) are the esters (halo)alkyl and (halo)cycloalkyl of the (meth)acrylic acid, halo = Cl, Br, from 1 to 20 carbon atoms.

15. Compositions according to claims 13-14, wherein the monomers of group b) are those containing C_4 - C_{12} perfluoroalkyl chains, preferably containing the sulphonamide group, selected from:



when R_{11} is based on PFPEs, selected from:



wherein T = C_1 - C_3 perfluoroalkyl, optionally one or more F atoms of T , generally one F atom, are substituted by H and/or Cl; m and n are as above defined.



wherein T , n' and m' have the above mentioned meanings, q is an integer from 0 to 1, A is a bivalent radical, preferably of linear aliphatic type $(\text{CH}_2)_{m'0}$ wherein $m'0$ is an integer from 1 to 20, or (alkylen)cycloaliphatic, (alkylen) aromatic type. A optionally can contain heteroatoms in the ring or in the alkylene chain, or it can be

both a linear and branched polyalkylenoxy chain, in particular containing repeating units of the $\text{CH}_2\text{CH}_2\text{O}$, $\text{CH}_2\text{CH}(\text{CH}_3)\text{O}$, $(\text{CH}_2)_3\text{O}$, $(\text{CH}_2)_4\text{O}$ type. A can also contain groups of amidic, ester, ether, COO type, of sulphide, iminic type; the carbon atom number of the cycloaliphatic compounds being from 3 to 20, for the aromatic ones from 6 to 20; the A group can also be a combination of the mentioned types; the bond group of A with the perfluoromethylene group of the fluorinated chain can be for example: $-\text{C}-$, $-\text{O}-$, $-\text{CONR}-$ (R is H, alkyl, cycloaliphatic or aromatic groups having less than 15 carbon atoms), $-\text{CO}_2-$, $-\text{COS}-$, $-\text{CO}-$, one heteroatom, or the triazinic or heterocyclic aromatic groups having 5 or 6 atoms containing 2 or more heteroatoms equal to or different from each other; T_0 is $-\text{COOCH}=\text{CH}_2$, $-\text{COOCH}_2\text{CH}=\text{CH}_2$.

16. Use of the compositions according to claims 1-15 to treat textiles and fibers.

17. Textiles treated with the compositions according to claims 1-15.



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 10 5518

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 714 082 A (ALM ROGER R ET AL) 3 February 1998 (1998-02-03) * example C18 *	1, 16	C08L33/16 C08L75/04 D06M15/277 D06M15/576
A	WO 93 01349 A (MINNESOTA MINING & MFG) 21 January 1993 (1993-01-21) * claim 1 *	1	
A,D	EP 0 273 449 A (AUSIMONT SPA ;LARAC SPA (IT)) 6 July 1988 (1988-07-06) * claims *	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			C08L D06M
Place of search		Date of completion of the search	Examiner
THE HAGUE		28 June 2000	Schueler, D
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 02 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 10 5518

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-06-2000

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5714082 A		03-02-1998	AU 699909 B	17-12-1998
			AU 5668496 A	18-12-1996
			CA 2219894 A	05-12-1996
			EP 0828888 A	18-03-1998
			JP 11506170 T	02-06-1999
			WO 9638622 A	05-12-1996
WO 9301349 A		21-01-1993	AU 2297692 A	11-02-1993
EP 0273449 A		06-07-1988	IT 1213441 B	20-12-1989
			CA 1319220 A	15-06-1993
			DE 3777363 A	16-04-1992
			JP 2618617 B	11-06-1997
			JP 8325951 A	10-12-1996
			JP 2540572 B	02-10-1996
			JP 63295616 A	02-12-1988
			KR 9704930 B	10-04-1997
			KR 9707320 B	07-05-1997
			US 4983666 A	08-01-1991
			US 5068135 A	26-11-1991

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82